

The KYTOLA® variable area flow meter model D is a clear, easy to read acrylic flow meter.

It is a reliable instrument for measuring and monitoring liquid and gas flows.



- For liquid or gas
- Flow rate water up to 28 USGPM (100 L/min)
- Flow rate air up to 100 SCFM (2500 NL/min)
- Maximum pressure 290 psi (20 bar)
- Maximum temperature 167°F (75°C)

ISO 9001 ISO 14001

FLOW METER D

FEATURES

- Machined acrylic body
- Clear, easy to read scales

TYPICAL APPLICATIONS

- Water treatment
- Sealing water measurements
- Gas flow measurements

OPTIONS

- Scales for alternative liquids and gases
- Special scale markings
- Thread adapters

Model

D

Connections	G 1", thread adapters must be used for NPT connections
Body	Acrylic (PMMA)
Max. pressure	290 psi (20 bar) up to max temperature 440 psi at 85°F (30 bar at 30°C)
Max. temperature	165°F (75°C)
Weight	1.4 lb (620 g)
Accuracy	±5% F.S. (H ₂ O, +70°F)

D-

Flow Range


H ₂ O USGPM	H ₂ O L/min	Air SCFM	Air NL/min	
2 – 10	7.5 – 40	7.5 – 42.5	200 – 1100	4A
2 – 14	7.5 – 50	10 – 55	200 – 1400	4B
2 – 15	10 – 60	10 – 57.5	300 – 1500	4C
2 – 20	10 – 80	10 – 80	300 – 2100	4D
4 – 28	10 – 100	10 – 100	500 – 2500	4E

Scale

H ₂ O scale L/min (20°C)	A
H ₂ O scale USGPM (70°F)	G
H ₂ O scale USGPH (70°F)	N
Air NL/min (20°C, 1.013 bar abs)	R
Air scale SCFM (70°F, 14.7 psia)	T
Air SCFH (70°F, 14.7 psia)	V
Relative scale 0–10	D

NPT Adapters (two required)

ZADR1N3/4K	Nylon	1" G x 3/4" NPT
ZADR1NK	Nylon	1" G x 1" NPT
ZADR1N11/4K	Nylon	1" G x 1 1/4" NPT
ZADR1N3/4H	AISI316	1" G x 3/4" NPT
ZADR1NH	AISI316	1" G x 1" NPT
ZADR1N11/4H	AISI316	1" G x 1 1/4" NPT

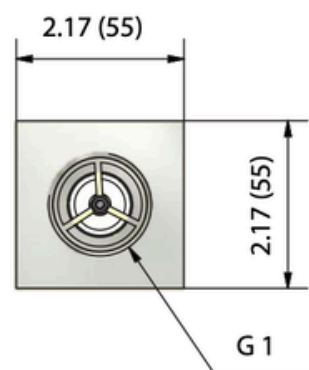

NOTE: Measurements in the drawings in this datasheet are in inches (and millimeters) if not stated otherwise.

Kytola
INSTRUMENTS

www.kytola.ca



Kytola Instruments Inc.

900 Old Roswell Lakes Parkway, Suite 120
Roswell, GA 30076, USA
Tel: +1 678 701 3569
Fax: +1 514 448 5151
E-mail: flow@kytola.ca