


The KYTOLA® model KLFH is a sturdy industrial variable area flow meter. It is a reliable instrument for measuring and monitoring liquid and gas flows.

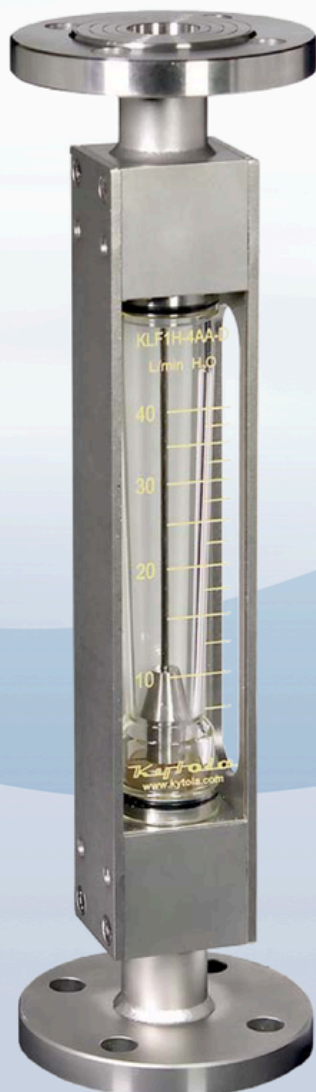

- Flange connections DN or ANSI
- Flow rate water up to 27.5 USGPM (120 L/min)
- Flow rate air up to 120 SCFM (3000 NL/min)
- Alarm-ready

ISO 9001 ISO 14001

FLOW METER KLFH

FEATURES

Sturdy construction with protected flow tube

Stainless steel body and side plates

TYPICAL APPLICATIONS

Sealing water measurement of vacuum pumps

Lubrication oil measurements

Liquid and gas flow measurements

Flush water applications

OPTIONS

Scales for alternative liquids and gases

PES flow tube


Viton or EPDM seals

Low and high flow alarm

Model	KLF1H	KLF2H
Connections	DN25 PN25 or ANSI 1" 150 lbs flanges	DN40 PN25 or ANSI 1½" 150 lbs flanges
Weight	11 lbs (5.1 kg)	14 lbs (6.3 kg)
Max temperature	176°F (80°C), *248°F (120°C)	176°F (80°C), *248°F (120°C)
Body	AISI 316	AISI 316
Float	AISI 329 Note! Other possible wetted metal parts: AISI 316	
Flow tube	Grilamid (PA-12) or *PES	
Seals	Nitrile (*Viton®, *EPDM)	
Accuracy	± 5% F.S. (H ₂ O, 70°F/20°C)	

*) Special construction on request

Connections			
DN25 or ANSI 1" flanges			
DN40 or ANSI 1½" flanges			
Flow Range H₂O			
USGPM	L/min	Flow Range Air	SCFM
2-11	7.5-40	7.5-45	200-1200
2.5-15	10-55	10-60	200-1500
2.5-17	10-65	10-65	300-1800
4-22	10-85	10-85	400-2200
2.5-27.5	10-120	20-120	400-3000
Scale			
H ₂ O L/min (20°C)			
H ₂ O USGPM (70°F)			
Air NL/min (20°C/1.013 bar abs)			
Air SCFM (70°F/14.7 psia)			
Relative 1-10			
Features			
Alarm readiness			
DN connections			
ANSI connections			
Grilamid flow tube, nitrile seals			
PES flow tube, nitrile seals			
PES flow tube, Viton® seals			
Grilamid flow tube, Viton® seals			
EPDM seals			
Standard feature: leave blank			
Special feature: choose Character			

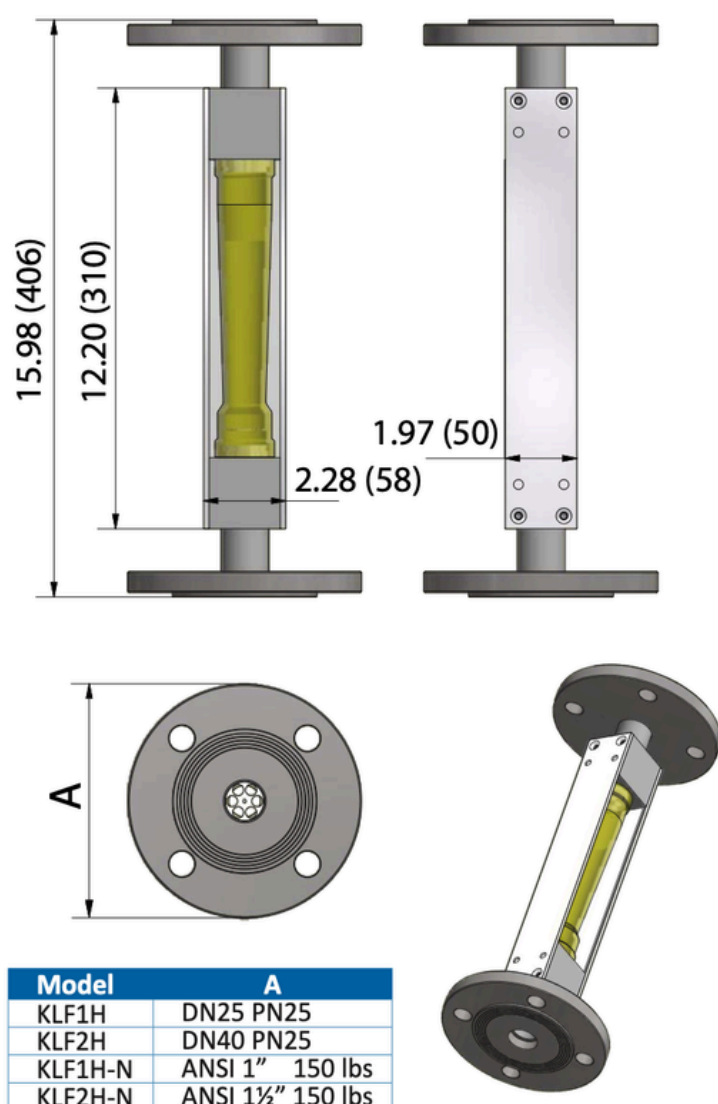

Model	A
KLF1H	DN25 PN25
KLF2H	DN40 PN25
KLF1H-N	ANSI 1" 150 lbs
KLF2H-N	ANSI 1½" 150 lbs

NOTE: Measurements in the drawings in this datasheet are in inches (and millimeters) if not stated otherwise.